

CORROSION PROTECTION

approx. RAL 7032

TIGER Drylac® 270/70158 | GL/FTM
TIGER Drylac® 271/70003 | GL/GL
TIGER Drylac® 273/70001 | GL/SGL



approx. RAL 7042

TIGER Drylac® 270/70400 | GL/FTM
TIGER Drylac® 270/70338 | GL/FTM
TIGER Drylac® 271/70100 | GL/GL
TIGER Drylac® 272/70855 | GL/GL



Certificates



Certification of Management System:
ISO 9001 | ISO 14001 | IATF 16949 | DBS 918 340



Download
Certificates

The living global TIGER network at your service.



Production facilities

Austria | China | Canada | Mexico | U.S.A. | Vietnam

Affiliated companies and distribution

Europe

Austria | Benelux | Bosnia & Herzegovina | Bulgaria | Croatia | Czech Republic | Estonia | France
Germany | Great Britain | Greece | Hungary | Italy | Latvia | Lithuania | Macedonia | Poland
Romania | Serbia & Montenegro | Slovakia | Slovenia | Spain | Switzerland | Türkiye | Ukraine

North America

Canada | Mexico | U.S.A.

Asia

China | Japan | Taiwan | Vietnam

Africa

Egypt

www.tiger-coatings.com



Fotocredit: titel left to right: Borg Enders - Fotolia, mihalec - Depositphotos | page 2/3: davis - Fotolia



Powder Coating Corrosion Protection Primer

Long-lasting corrosion protection

Dual layer system

TIGER-SHIELD

9981030087 / August 2024




Effective Corrosion Protection with Powder Coating

High humidity, temperatures above 0 °C, and reactive air contaminants, such as sea salt, are the big drivers of metal corrosion. In addition, aggressive chemicals can trigger, favor and accelerate this process.

If no countermeasures are taken, a steel surface can degrade up to 200 µm of layer thickness in just one year.




Scan me!

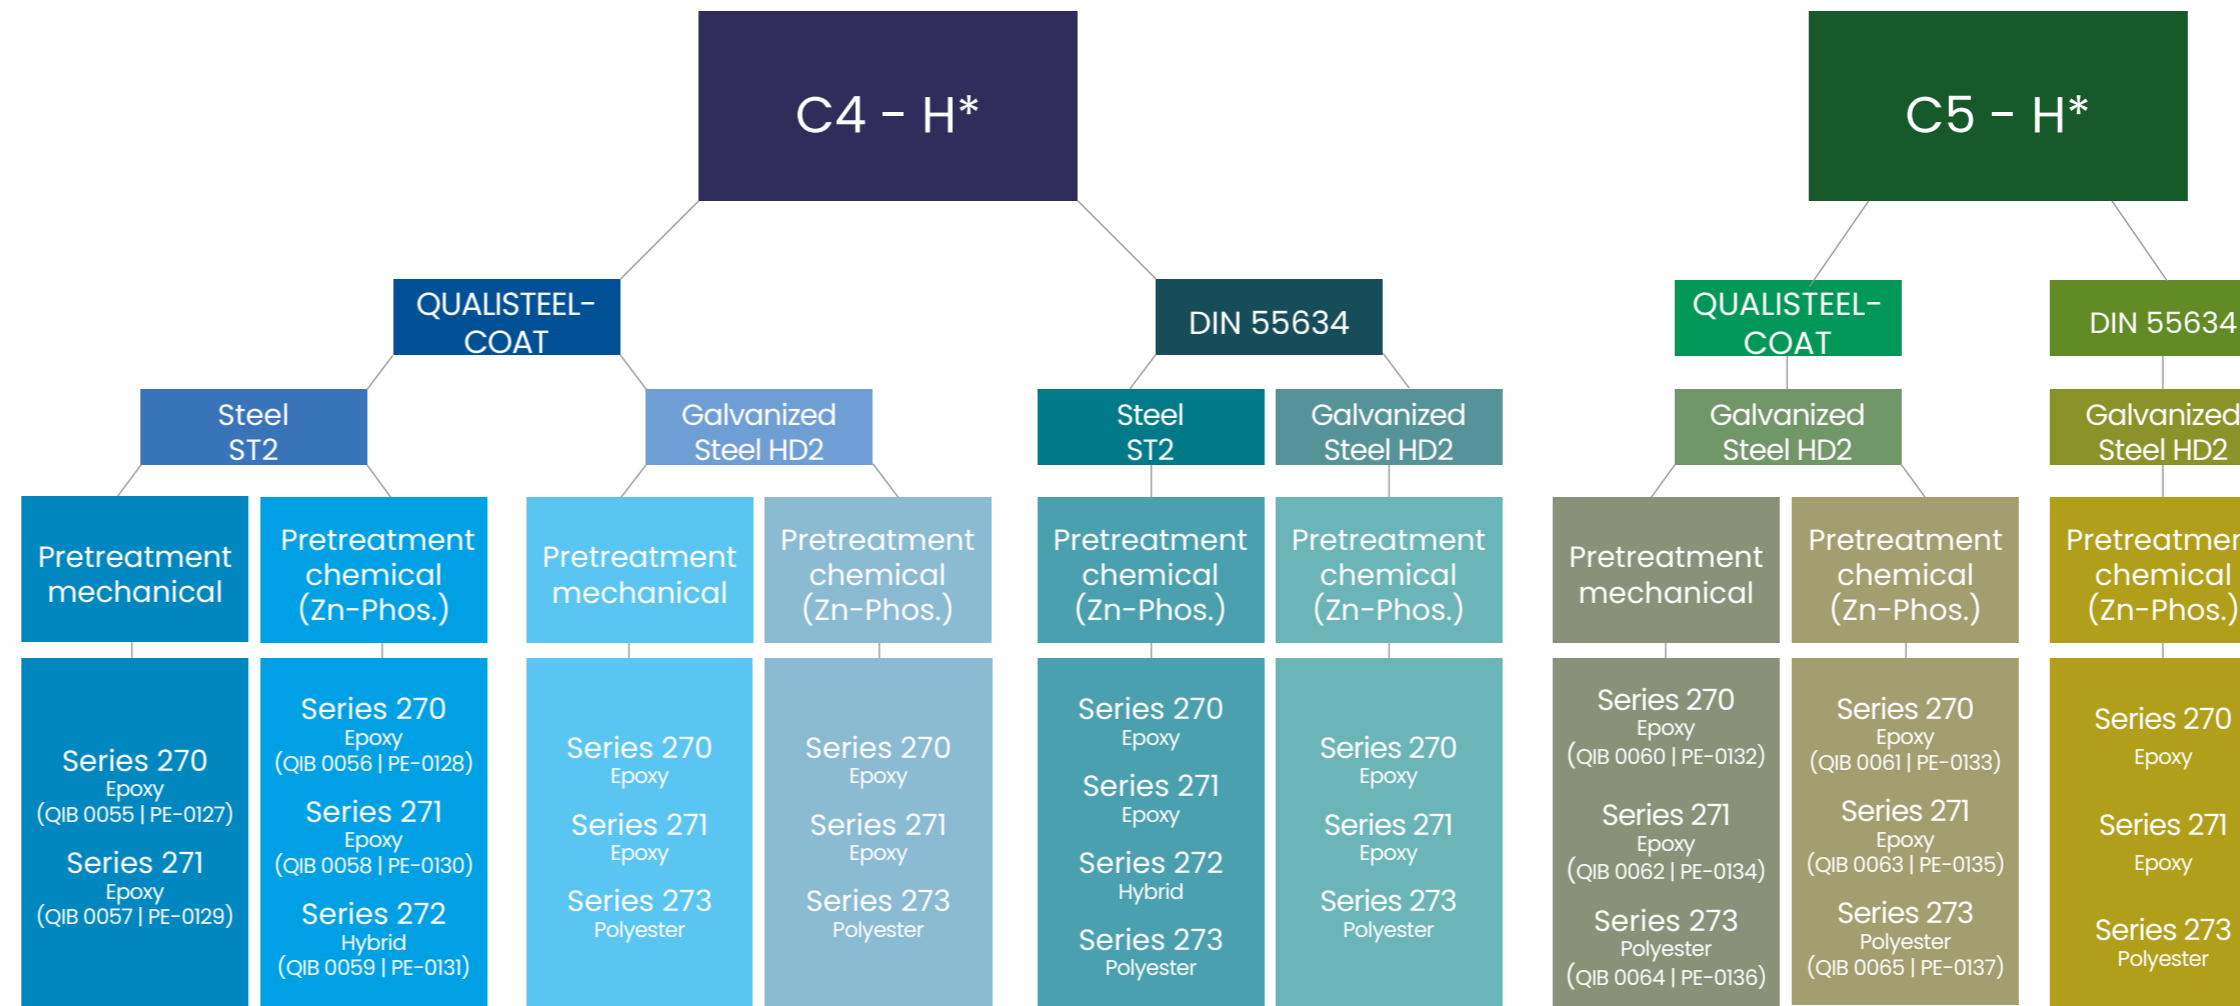

TIGER Drylac® Primer	TIGER Drylac® Product-ID	Color	Chemistry	Features	Substrate	Surface	Cure parameters
Series 270	270/70158	RAL 7032	Epoxy	outgassing friendly, very good edge coverage	Steel + galvanized Steel Aluminum	smooth flat matte	160 °C / 30 min 180 °C / 15 min 200 °C / 8 min
	270/70400	approx. RAL 7042		highly outgassing forgiving, very good edge coverage			
	270/70338	approx. RAL 7042					
Series 271	271/70100	approx. RAL 7042	Epoxy	low temperature, very good edge coverage	Steel + galvanized Steel	smooth glossy	140 °C / 30 min 160 °C / 15 min 200 °C / 5 min
	271/70003	RAL 7032					
Series 272	272/70855	approx. RAL 7042	Hybrid	outgassing friendly, excellent flow, good edge coverage	Steel + galvanized Steel Aluminum	smooth glossy	160 °C / 30 min 180 °C / 15 min 200 °C / 8 min
Series 273	273/70001	approx. RAL 7032	Polyester	UV stable, very good edge coverage	Steel + galvanized Steel Aluminum	smooth semi gloss	160 °C / 30 min 180 °C / 15 min 200 °C / 8 min

Corrosivity category according to DIN EN ISO 12944-2	Neutral salt spray test / h**	Examples for ambient conditions	
		Exterior	Interior
C1 - very low	-	n/a	Heated buildings with clean atmosphere.
C2 - low	240 h	Outdoor areas without heavy pollution.	Unheated buildings.
C3 - medium	480 h	Outdoor areas with medium SO2 load and coastal regions with low salinity.	Production building with high humidity and some contamination.
C4 - high	720 h	Industrial areas and coastal regions with medium salt content.	Chemical plants, swimming pools and ports.
C5 - very high	1.440 h	Industrial areas with aggressive atmosphere and high humidity. Coastal regions with high salinity.	Buildings with continuous condensation and polluted atmosphere.

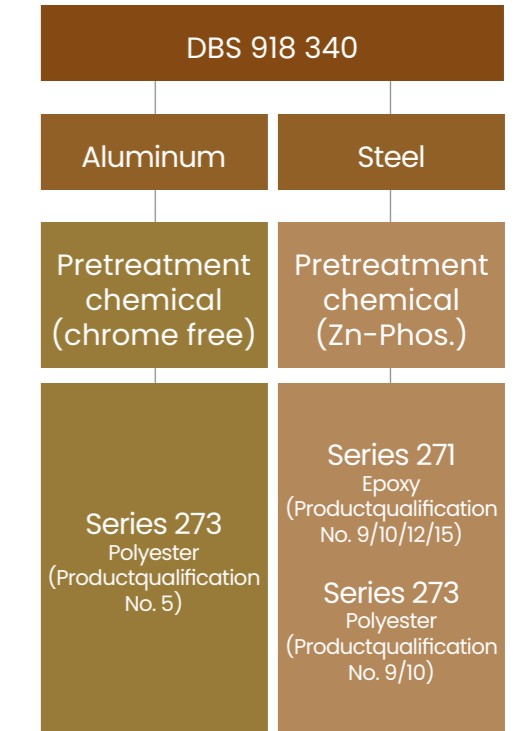

Abbreviation
 ST2 Steel; 2 powder coating layers
 HD2 Hot-dip galvanized steel; 2 powder coating layers
 DBS 918 340 Deutsche Bahn Standard

* Certificates for C5 - H are valid for C4 - H as well.
 ** Standard durability range according to DIN EN ISO 12944-1: high (H) - 15 to 25 years (for all corrosivity categories)
 Source bottom table: Qualisteelcoat Technical Specification Version 4.1 - January 2019 page 6 | <http://qualisteelcoat.it/wp-content/uploads/2018/05/QUALISTEELCOAT-Version-4.1.pdf>